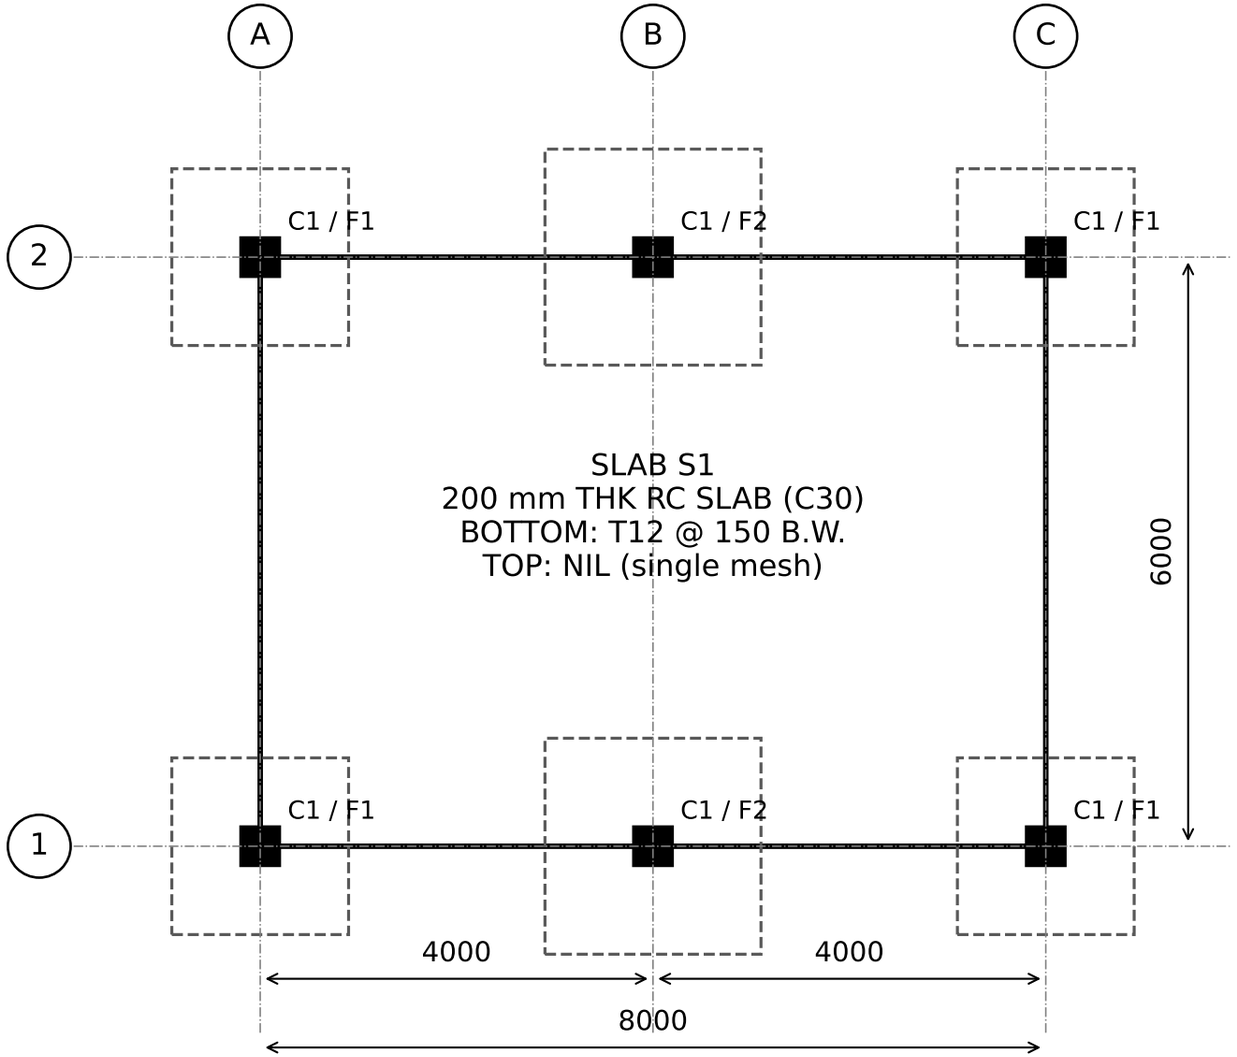

FOOTING SCHEDULE (isolated pad, C30)
F1 1800 x 1800 x 500 thk (4 no.) BOTTOM T16 @ 200 B.W.
F2 2200 x 2200 x 600 thk (2 no.) BOTTOM T16 @ 200 B.W.
COLUMN C1 400 x 400, 6 no., height 3000 (top of footing to soffit of slab), rebar by others

NOTES
1. All dimensions in mm. Slab edge flush with grid lines (slab 8000 x 6000).
2. Covers: slab 25 mm, footings 75 mm. Straight bars, no laps or hooks.
3. 50 mm C15 blinding under footings, projecting 100 mm each side.
4. Underside of blinding at -1.55 m below NGL. Excavation with vertical sides, 300 mm working space each side beyond footing.
5. Steel unit mass: T12 = 0.888 kg/m, T16 = 1.578 kg/m.

SAMPLE DRAWING S-101 | RC SLAB & FOOTING PLAN | Scale NTS | Synthetic test drawing (not a real project)