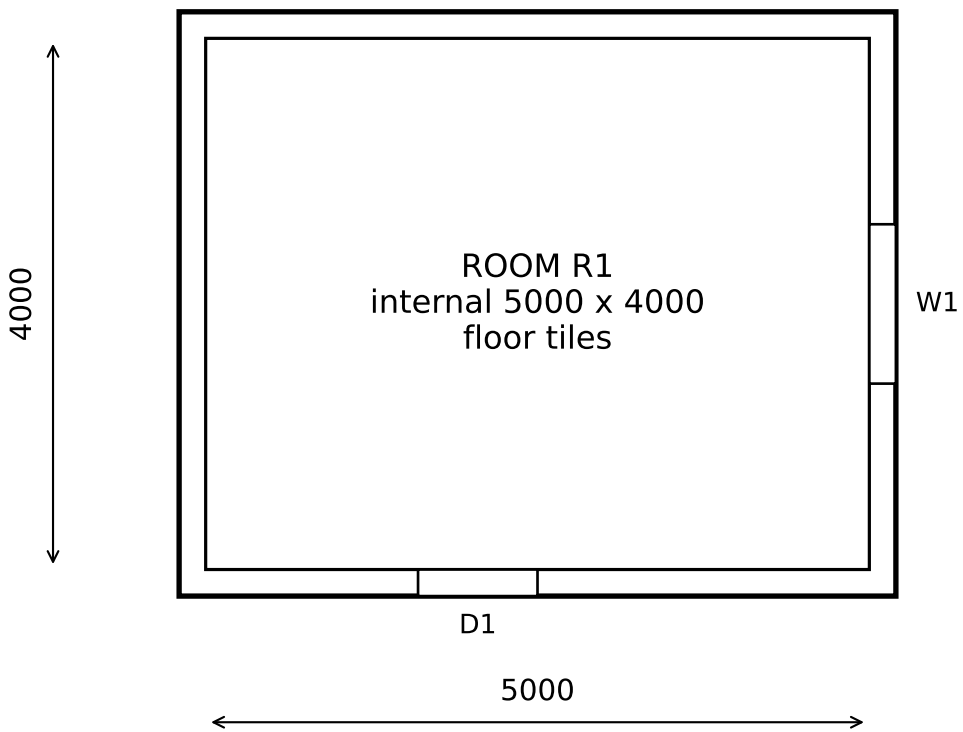

WALL AND FINISH SCHEDULE
WALL W1 block 200 mm thk, height 3000, centreline 18800 mm (1 no.)
OPENING D1 900 x 2100 (1 no.) deduct wall and plaster
OPENING W1 1200 x 1200 (1 no.) deduct wall and plaster
PLASTER both sides, openings deducted, reveals not measured
FLOOR internal 5000 x 4000 tiles
SCREED 50 mm under tiles
SKIRTING internal perimeter, deduct door 900 mm

NOTES
1. All dimensions in mm.
2. Centreline 18800 mm = 2 x ((5000 + 200) + (4000 + 200)).
3. Blockwork is measured net of openings. No wastage is shown.
4. Plaster is both faces, openings deducted, reveals not measured.
5. Floor tiles and screed are the internal room area.
6. Skirting is the internal perimeter with the door width deducted.
   The window is not deducted from the skirting.

SAMPLE DRAWING A-101 | FLOOR PLAN | Scale NTS | Synthetic test drawing (not a real project)