STRIP FOOTING SCHEDULE (C25)
SF1 600 x 400 thk centreline 36000 mm closed (1 no.) LONG 3 T12 TRANSVERSE T10 @ 200
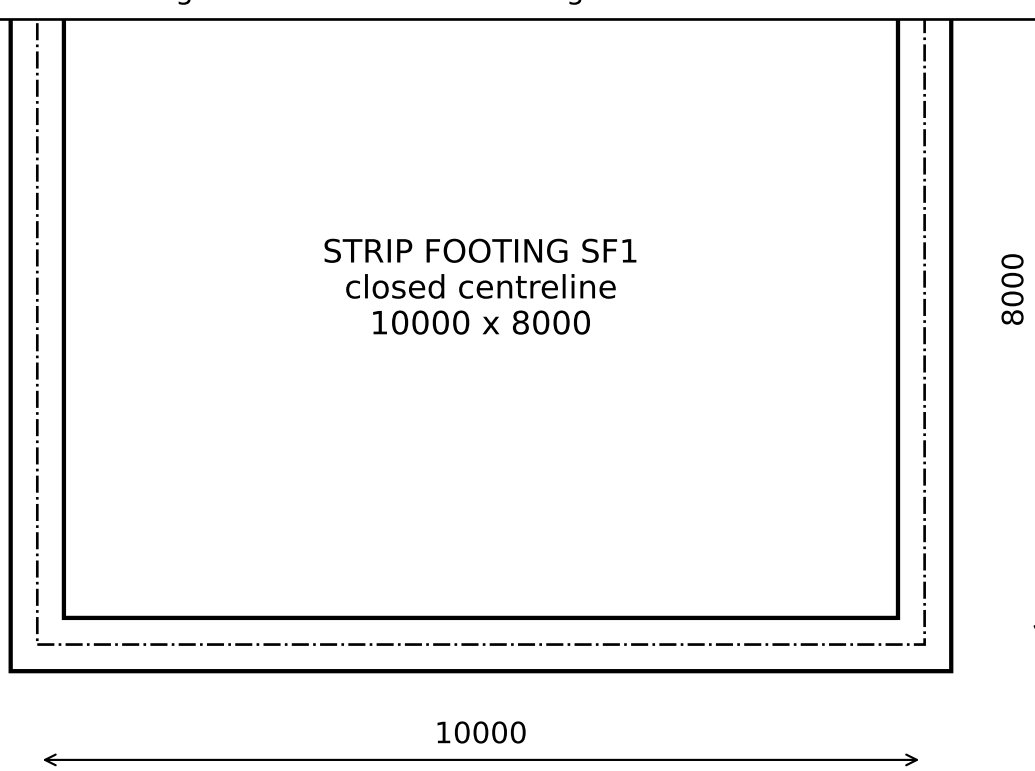
NOTES
1. All dimensions in mm. SF1 is one closed rectangular strip.
2. Centreline length 36000 mm = 2 x (10000 + 8000). Do not add corners again.
3. Cover: footings 50 mm. Straight bars, no laps or hooks.
4. 50 mm C15 blinding under the strip, projecting 100 mm each side.
5. Underside of blinding at -1.20 m below NGL. Excavation with vertical sides,
   250 mm working space each side beyond the strip.
6. Steel unit mass: T12 = 0.888 kg/m, T10 = 0.617 kg/m.
7. No wastage is shown on this drawing.