SAMPLE DRAWING S-201
FOUNDATION PLAN

CONTINUOUS FOOTING SCHEDULE (4000 PSI)
CF24 2 ft 0 in wide x 1 ft 0 in thick centreline 317 ft 4 in closed (1 no.) LONG (3) #5

WALL FW1 concrete 8 in thk, height 5 ft 8 in, centreline 129 ft 10 in (1 no.)
WALL FW1 concrete 8 in thk, height 4 ft 4 in, centreline 187 ft 6 in (1 no.)

6 in THK CONCRETE SLAB-ON-GRADE inside 118 ft 8 in x 38 ft 8 in (4000 PSI)
REINFORCE SLAB WITH 6x6 W2.1xW2.1 WWF CTRD IN THE SLAB

NOTES
1. All dimensions in feet and inches.
2. No laps or hooks. No wastage is shown on this drawing.
3. Steel unit mass: #5 = 1.043 lb/ft.
4. Out-to-out building 120 ft 0 in x 40 ft 0 in with 8 in walls.
5. The slab is the inside area and is on grade. No soffit formwork.
6. Wall heights run from the top of the footing up to the top of the wall.
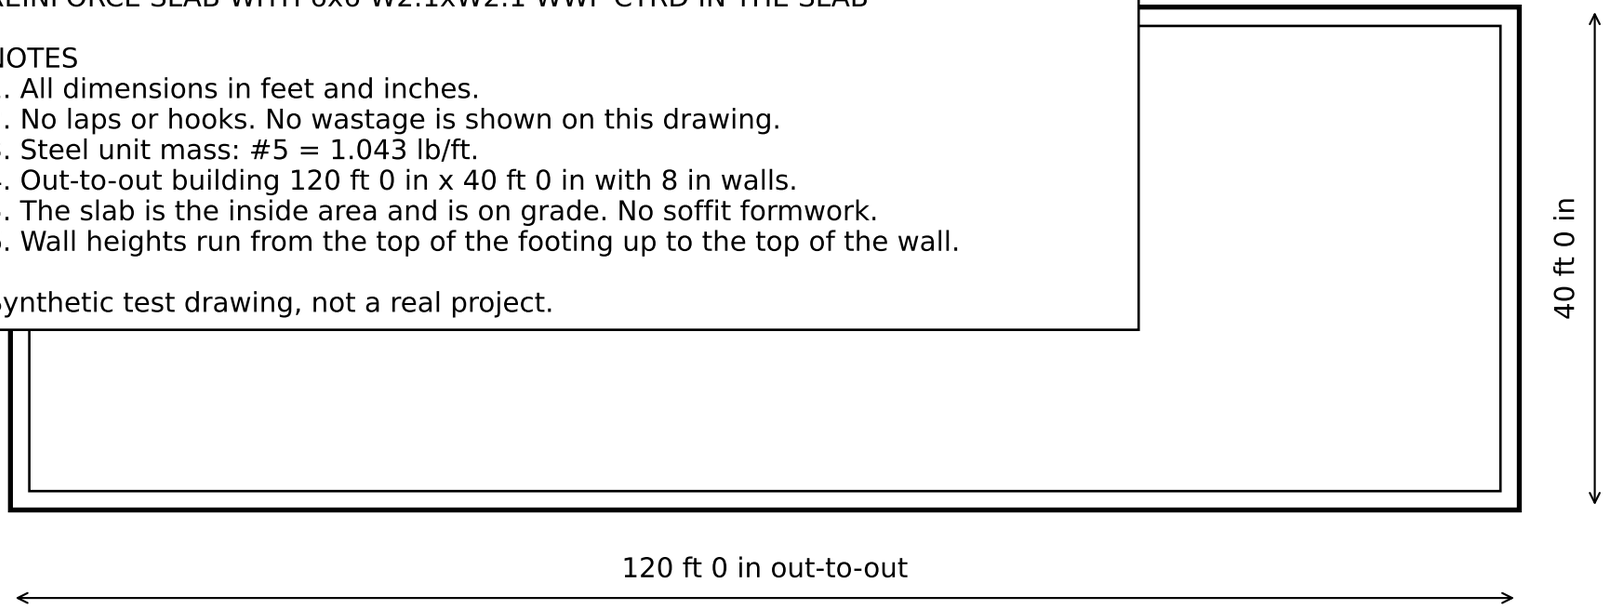
Synthetic test drawing, not a real project.